


## Digital Multimeter **Protek 301/32/81**



**Protek 301**

### Features

- 3 1/2 Digits Display
- Low Cost
- DC 10A
- Pocket Size
- Diode Check
- DC Voltage: 200mV/2000mV/20V/200V/1000V
- DC Current: 200µA/2000µA/20mA/200mA/2000mA/10A
- AC Voltage: 200V/750V
- Resistance: 200Ω/2000Ω/20KΩ/200KΩ/2000KΩ
- Diode Check; Test Voltage: 2.8V, Test Current: 1mA

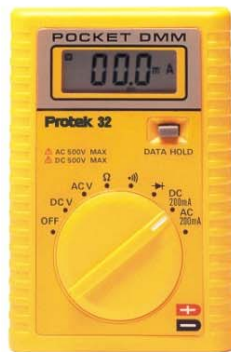

**Protek 32**

### Features

- 3 1/2 Digits Display
- Pocket Size
- Diode Check and Audible Continuity Buzzer
- Data Hold
- Rear Case has Probe and Cable Keeper
- DC Voltage: 200mV/2V/20V/200V/500V
- AC Voltage: 2V/20V/200V/500V
- Resistance: 200Ω/2000Ω/20KΩ/200KΩ/2000KΩ/20MΩ
- Diode Check; DC Current: 200mA, AC Current: 200mA

Digital  
 Multimeter



**Protek 81**

### Features

- 3 3/4 Digits Display (4,000 Counts), Bargraph
- Basic Accuracy 0.3% (DC V)
- Min./Max. Mode, Data Hold Mode
- Relative, Memory, Read Mode
- Frequency Measurement to 400KHz (0.1% Accuracy)
- Continuity Beeper and Diode Test
- Temperature "K" Type (TP35)
- DC Voltage: 400mV/4V/40V/400V/1000V
- AC Voltage: 40mV/4V/40V/400V/750V
- AC Current: 4mA/40mA/400mA/4000mA/10A
- Resistance: 400Ω/4KΩ/40KΩ/400KΩ/4000KΩ/40MΩ
- Frequency: 100Hz/1000Hz/10KHz/100KHz/400KHz
- Capacitance: 4nF/10nF/400nF/4µF/40µF