


## New Product

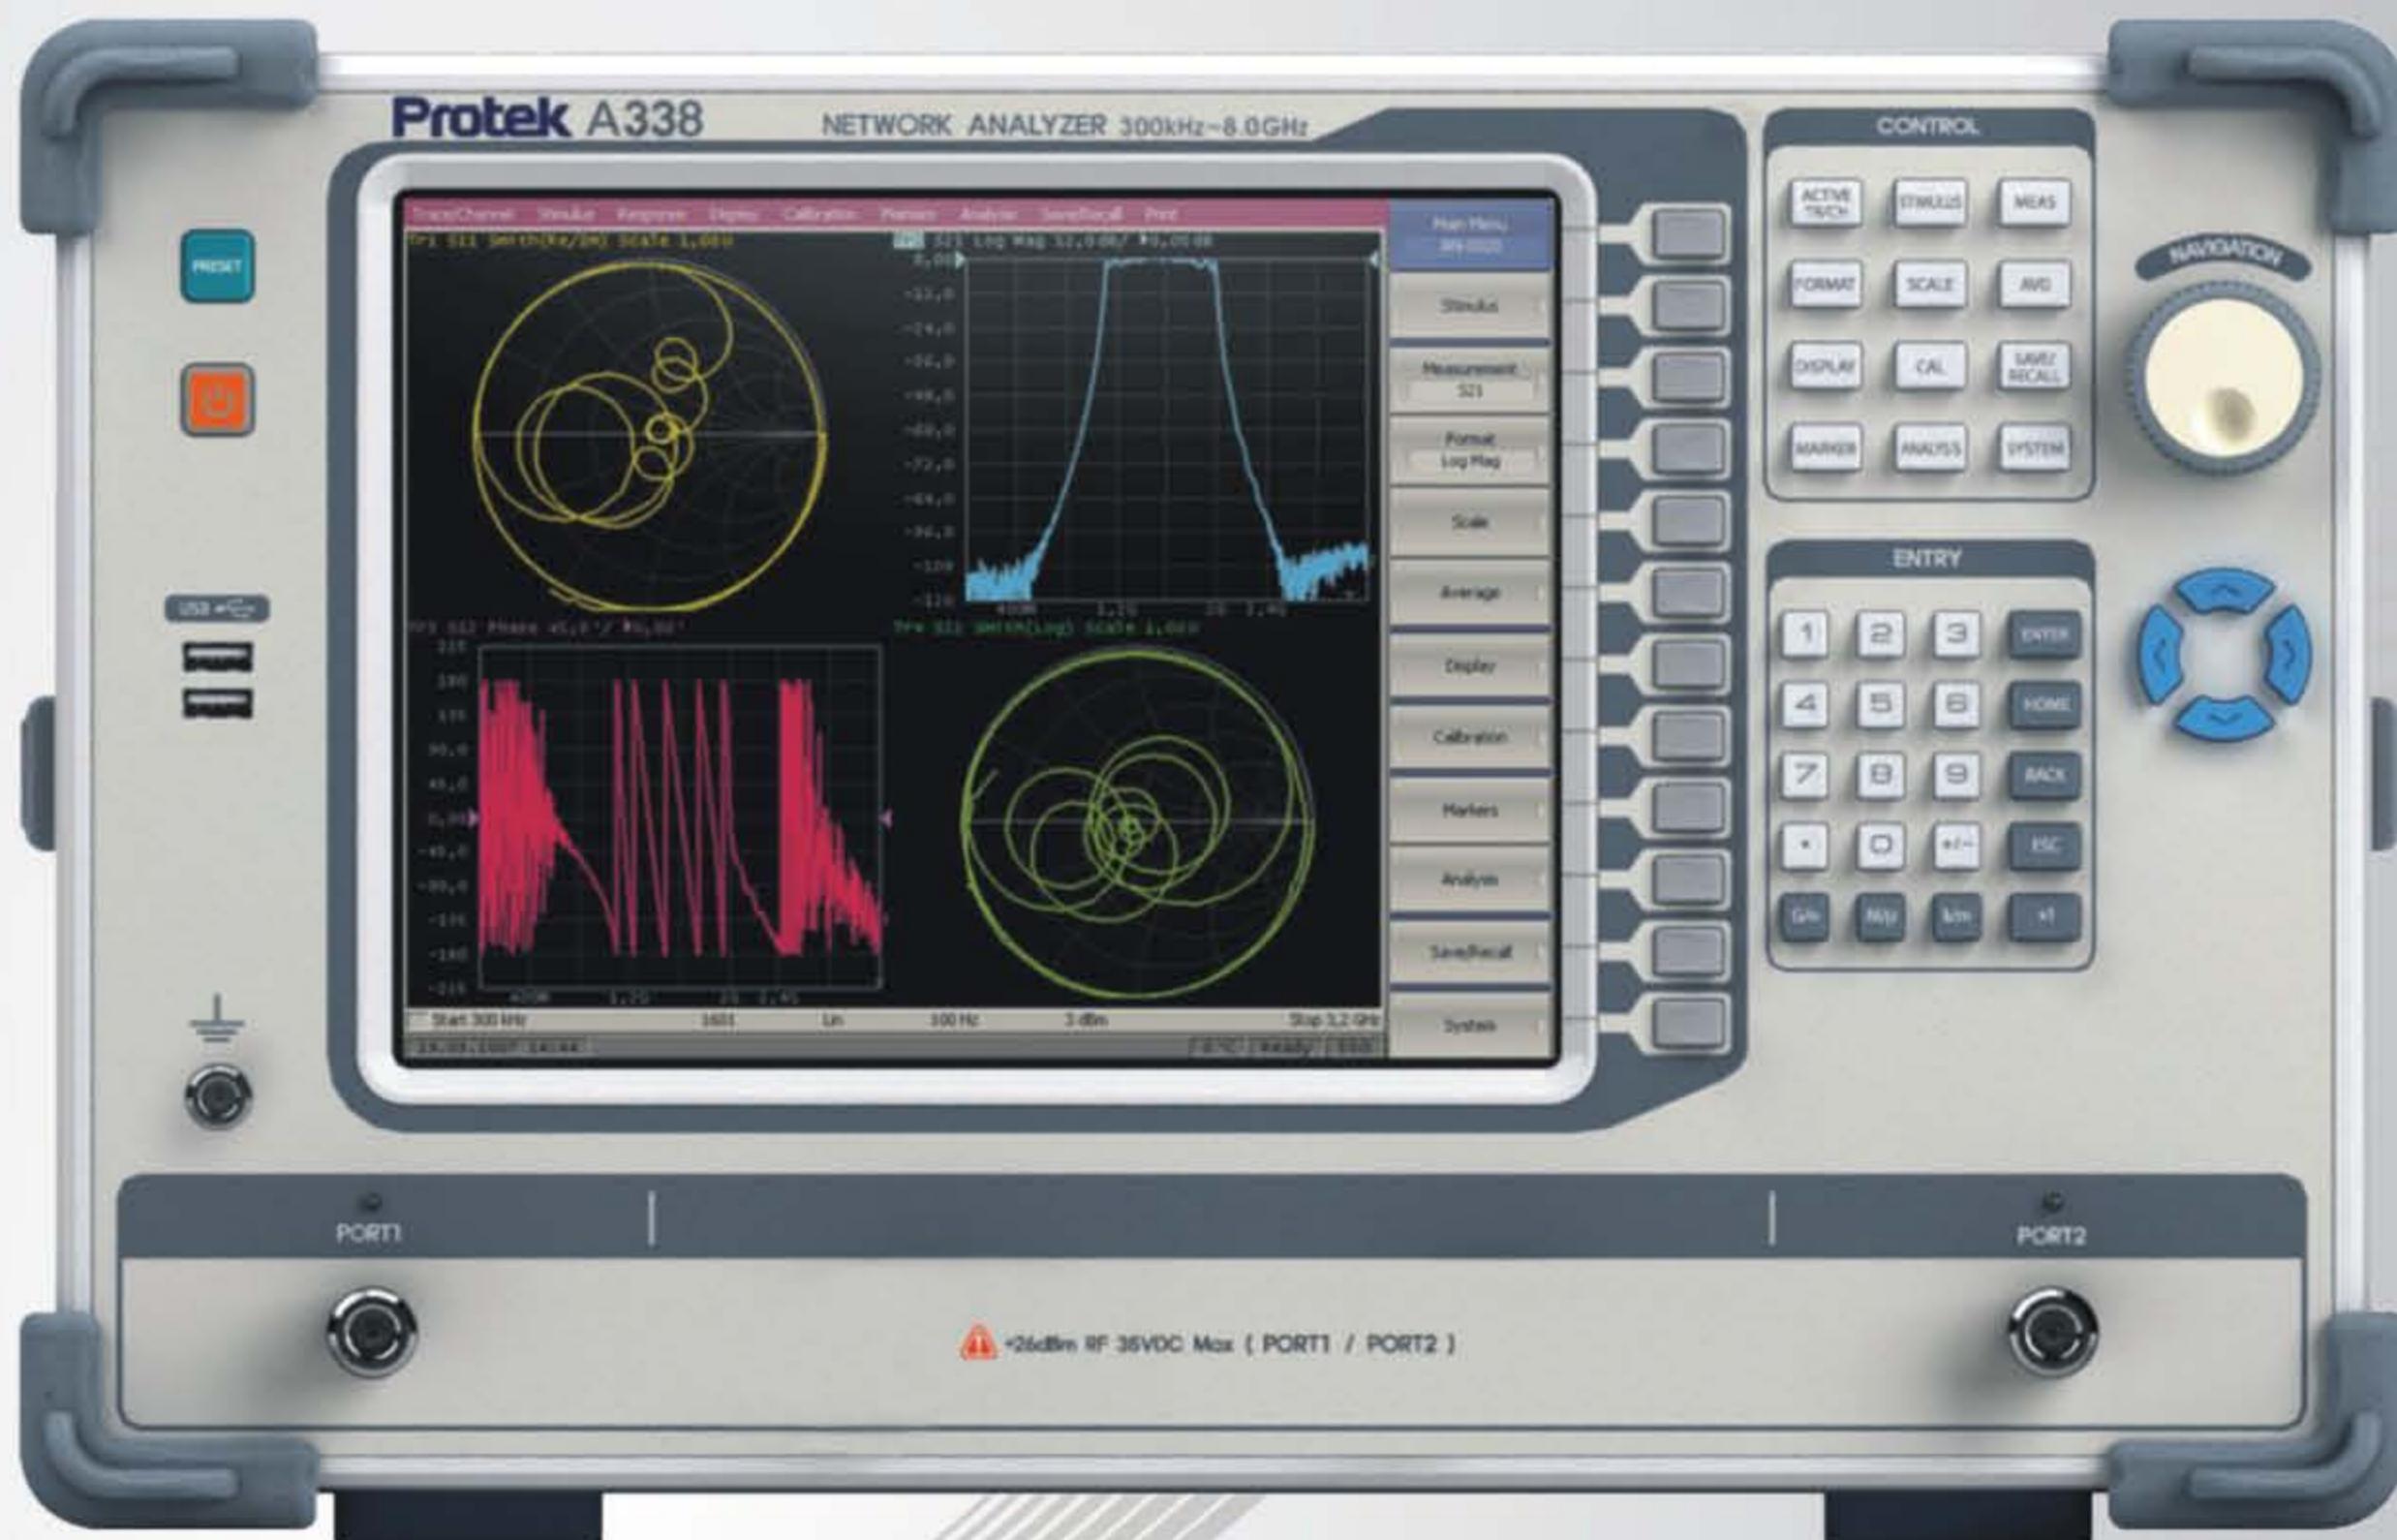

New Product

## 8GHz Network Analyzer

# Protek A338

### Protek A338

Protek A338 is vector network analyzer supporting from 300kHz to 8GHz and designed to analyze the properties of electrical networks, especially those properties associated with the reflection and transmission of electrical signals known as S-parameters.



### Frequency Range

- 300kHz ~ 8GHz
- -60dBm ~ +10dBm (300kHz~6GHz)

### Measurement Level

- -60dBm ~ +5dBm (6GHz~8GHz)

### Display

- 10.4 inch TFT Color LCD

Touch Screen

### Interface

- USB(2)/LAN/Print/Video/Keyboard/Mouse
- GPIB (Option)

### Operating System

- Windows XP

## Specifications

|   |  |                                      |
|---|--|--------------------------------------|
| Frequency range   | 300 kHz to 8 GHz   |                                      |
| CW frequency accuracy   | $\pm 5 \times 10^{-6}$   |                                      |
| Harmonic distortion   | -25 dBc  |                                      |
| Non harmonic spurious   | -30 dBc  |                                      |
| Output power level  | 300 kHz to 6.0 GHz   | -60 dBm to +10 dBm                   |
|   | 6.0 GHz to 8.0 GHz   | -60 dBm to +5 dBm                    |
| Output power level accuracy   | $\pm 1.0$ dB   |                                      |
| Magnitude transmission measurement accuracy, if $ S_{11} $ and $ S_{22} $ of the DUT are less than -32 dB, and $ S_{21} $ and $ S_{12} $ values are as follows: | +5 dB to +15 dB<br>-50 dB to +5 dB<br>-70 dB to -50 dB<br>-90 dB to -70 dB | 0.2 dB<br>0.1 dB<br>0.2 dB<br>1.0 dB |
| Phase transmission measurement accuracy, if $ S_{11} $ and $ S_{22} $ of the DUT are less than -32 dB, and $ S_{21} $ and $ S_{12} $ values are as follows:     | +5 dB to +15 dB<br>-50 dB to +5 dB<br>-70 dB to -50 dB<br>-90 dB to -70 dB | 2°<br>1°<br>2°<br>6°                 |
| Magnitude reflection measurement accuracy, if $ S_{11} $ and $ S_{22} $ values are as follows:  | -15 dB to 0 dB<br>-25 dB to -15 dB<br>-35 dB to -25 dB                     | 0.4 dB<br>1.0 dB<br>3.0 dB           |
| Phase reflection measurement accuracy, if $ S_{11} $ and $ S_{22} $ values are as follows:  | -15 dB to 0 dB<br>-25 dB to -15 dB<br>-35 dB to -25 dB                     | 3°<br>6°<br>20°                      |
| Receiver noise floor (IF bandwidth 10 Hz)   | -125 dBm   |                                      |
| Trace noise (IF bandwidth 3 kHz)  | 0.001 dB rms   |                                      |
| Uncorrected directivity   | -18 dB   |                                      |
| Uncorrected source match  | -18 dB   |                                      |
| Uncorrected load match  | -18 dB   |                                      |
| AC mains power  | 100 to 240 VAC 50/60Hz   |                                      |
| Power consumption   | 110W   |                                      |
| Dimensions LxWxH  | 320 x 439 x 280 mm   |                                      |
| Weight  | 20 kg  |                                      |
| Operating conditions :  |  |                                      |
| - Temperature   | 5 °C to 40 °C  |                                      |
| - Humidity at 25 °C   | 90%  |                                      |
| - Atmospheric pressure  | 84 to 106.7 kPa  |                                      |